

# WMC

## TECHNICAL SPECIFICATIONS:

- :: Housing: Die-cast aluminum
- :: Outdoor Wall Cylinders
- :: Finish: Bronze & Brushed Nickel
- :: LED: COB technology with prismatic reflector and frosted lens
- :: Input voltage: 120V
- :: Wattage: 15W (Down light); 20W (Up/Down light, 10W per end)
- :: Beam angle: 40° for each side
- :: CRI: >80
- :: Ultra slim at 18mm
- :: IP65, providing a reliable weather-tight seal



Bronze Finish  
(up/down light)




Brushed Nickel Finish  
(up/down light)



Bronze Finish  
(down light)



Brushed Nickel Finish  
(down light)

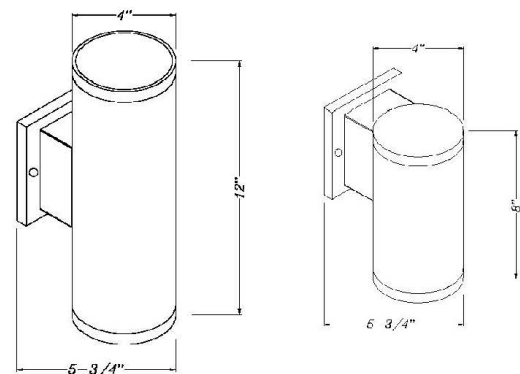

## LED WALL MOUNT CYLINDER LIGHTS

CATALOG NO.	DESCRIPTION	WATTS	LUMENS	COLOR TEMP	DIMENSIONS
WMC-DL-15W-30K-BR	Down light	15W	1144LM	3000K	4" x 8" x 5-3/4"
WMC-DL-15W-50K-BR	Down light	15W	1144LM	5000K	
WMC-UDL-20W-30K-BR	Up/Down light	20W	1667LM	3000K	4" x 12" x 5-3/4"
WMC-UDL-20W-50K-BR	Up/Down light	20W	1667LM	5000K	
WMC-DL-15W-30K-BN	Down light	15W	1144LM	3000K	4" x 8" x 5-3/4"
WMC-DL-15W-50K-BN	Down light	15W	1144LM	5000K	
WMC-UDL-20W-30K-BN	Up/Down light	20W	1667LM	3000K	4" x 12" x 5-3/4"
WMC-UDL-20W-50K-BN	Up/Down light	20W	1667LM	5000K	

